



Zhu, X., Doufexi, A., & Koçak, T. (2010). On the performance of IEEE 802.15.3c millimeter-wave WPANs: PHY and MAC. In *6th Conference on Wireless Advanced 2010 (WiAD), London, UK* (pp. 1 - 6). Institute of Electrical and Electronics Engineers (IEEE).
<https://doi.org/10.1109/WIAD.2010.5544875>

Peer reviewed version

Link to published version (if available):
[10.1109/WIAD.2010.5544875](https://doi.org/10.1109/WIAD.2010.5544875)

[Link to publication record in Explore Bristol Research](#)
PDF-document

University of Bristol - Explore Bristol Research

General rights

This document is made available in accordance with publisher policies. Please cite only the published version using the reference above. Full terms of use are available:
<http://www.bristol.ac.uk/red/research-policy/pure/user-guides/ebr-terms/>



On the Performance of IEEE 802.15.3c Millimeter-Wave WPANs: PHY and MAC

Xiaoyi Zhu, Angela Doufexi, and Taskin Kocak




Outlines

- Introduction of Millimeter-Wave WPAN
- Overview of IEEE 802.15.3c Standard
- 60 GHz Channel Model
- Simulation Performance Analysis
- Conclusion



🔥 Introduction

- 60 GHz Frequency Band Allocation

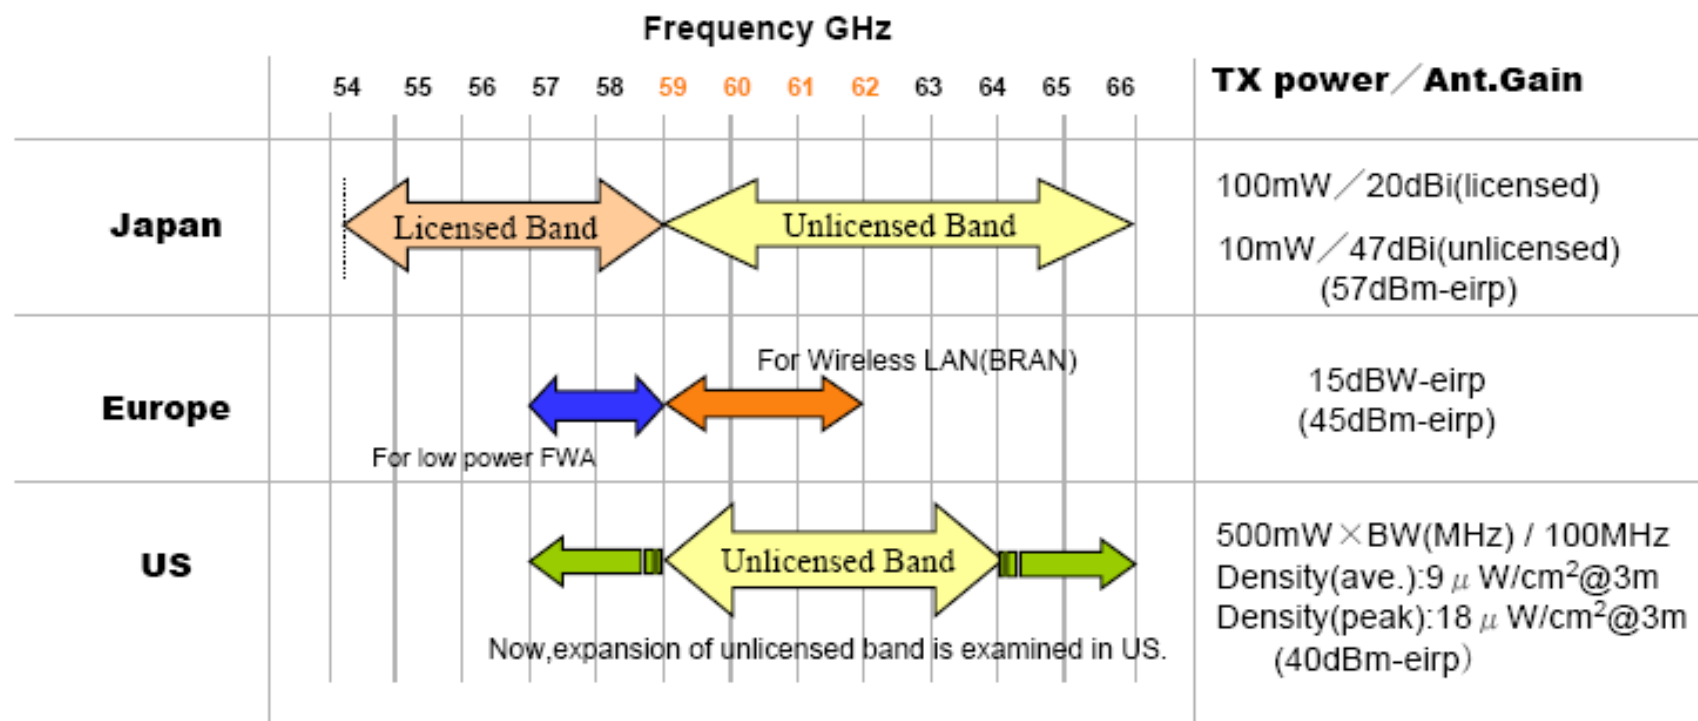

Source: S. David Silk, Motorola



Introduction

- Standards over 60 GHz Wireless

- IEEE 802.15.3c
- IEEE 802.11ad
- WirelessHD
- WiGig
- ECMA-387

Features:

- (1) In-door (<10m)
- (2) Uncompressed HDTV and high rate data transfer
- (3) At least 1 Gbps throughput, 3-4 Gbps preferable




Overview of IEEE 802.15.3c

- IEEE 802.15.3c specifies three operating modes and one common mode
 - Single Carrier (SC)
 - Low power and low complexity applications
 - High Speed Interface (HSI)
 - Low latency data transferring
 - Audio/Video (AV)
 - Uncompressed high definition video/audio

MCS index	Data rate (Mb/s)	Modulation scheme	FEC rate
<i>HSI Mode</i>			
1	1540	QPSK	1/2
2	2310	QPSK	3/4
3	2695	QPSK	7/8
4	3080	16-QAM	1/2
5	4620	16-QAM	3/4
6	5390	16-QAM	7/8
7	5775	64-QAM	5/8
<i>AV Mode</i>			
0	952	QPSK	1/3
1	1904	QPSK	2/3
2	3807	16-QAM	2/3

🔥 Overview of IEEE 802.15.3c

- OFDM Based Block Diagram

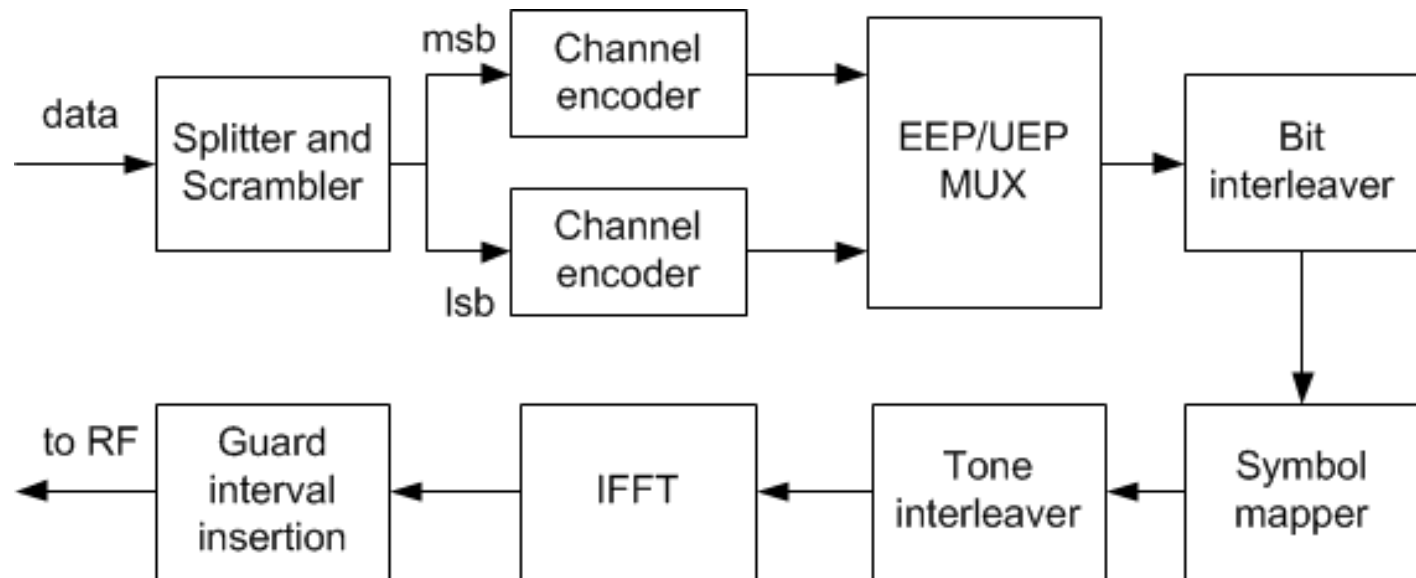

The block diagram of the transmitter

Overview of IEEE 802.15.3c

- OFDM Parameters

Parameter	Value	
	<i>HSI mode</i>	<i>AV mode</i>
Channel bandwidth (MHz)	1815	1760
Sampling frequency (MHz)	2640	2538
Number of subcarrier/FFT size	512	
Number of data subcarriers	336	
Number of pilot subcarriers	16	
Number of guard subcarriers	141	
Number of DC subcarriers	3	
Number of reserved subcarriers	16	
Guard interval length in samples	64	




Overview of IEEE 802.15.3c

- MAC Layer Throughput
 - *Throughput = Payload/Transmission Duration*
- Source of Overhead
 - Gap Time (MIFS, SIFS, RIFS)
 - Preamble
 - Header Fields
 - ACKs




🔥 Overview of IEEE 802.15.3c

- Acknowledgment Operations (1)
 - Imm-ACK

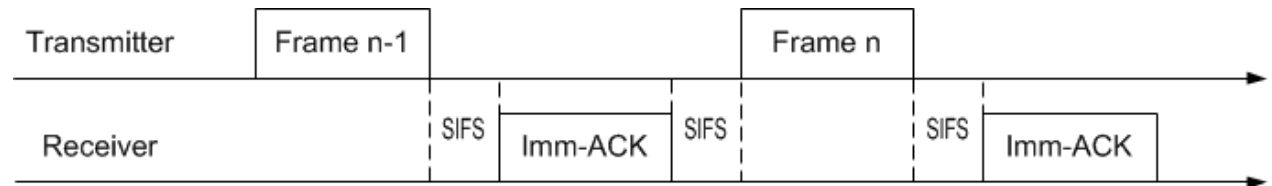


- Dly-ACK

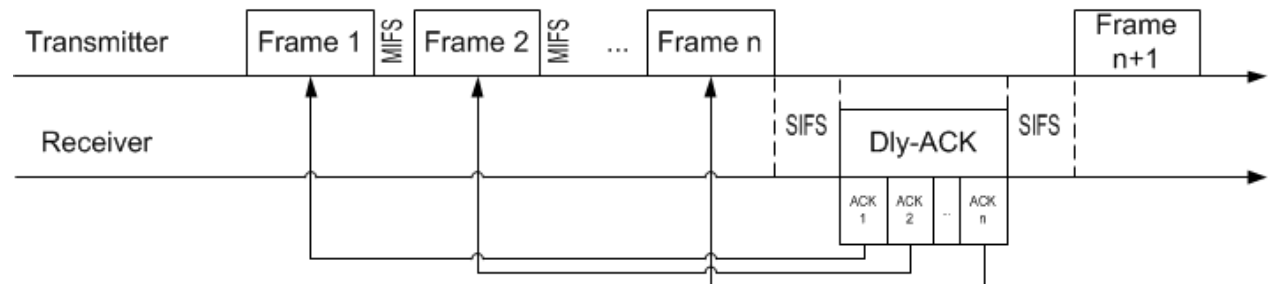


🔥 Overview of IEEE 802.15.3c

- Acknowledgment Operations (2)
 - Blk-ACK

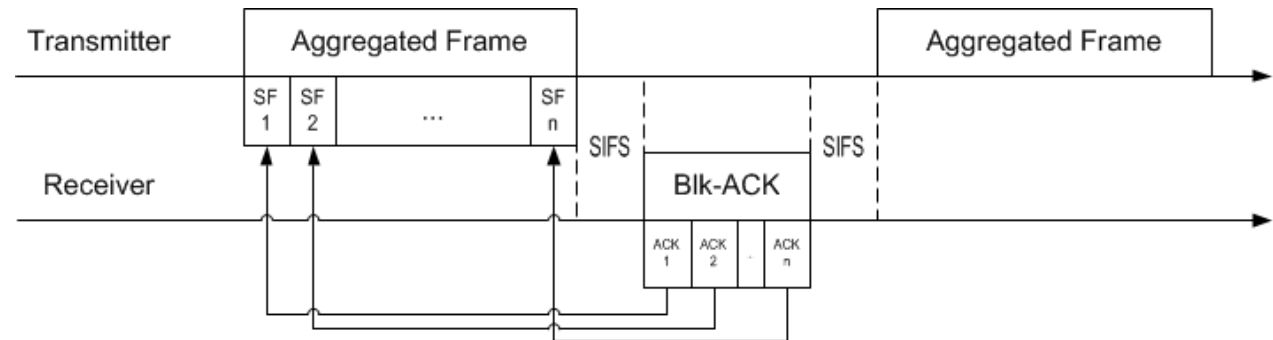

- Blk-NAK

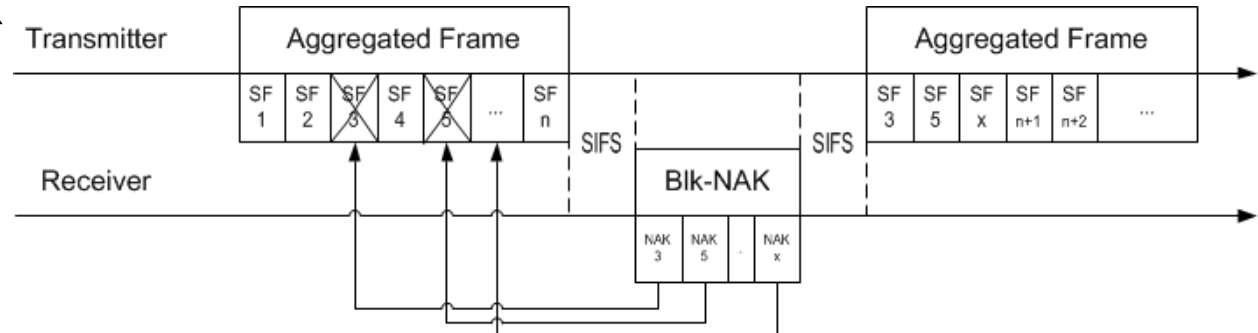


🔥 60 GHz Channel Model

- Large Scale Fading


- $\overline{PL}(d)[\text{dB}] = PL_0 + 10 \cdot n \cdot \log_{10} \left(\frac{d}{d_0} \right)$

- Small Scale Fading


- TSV model
 - Residential
 - Office
 - Library
 - Kiosk

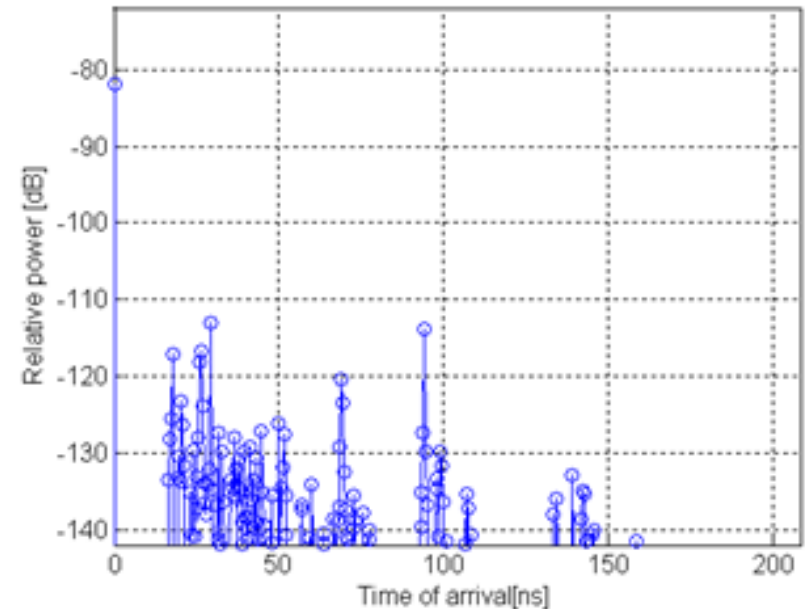

🔥 Performance Analysis (1)

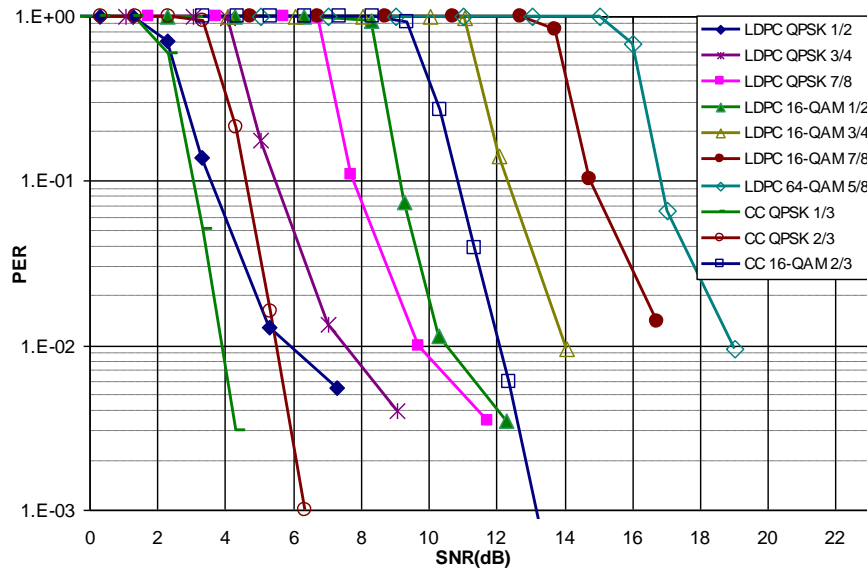

PER performance of different modes

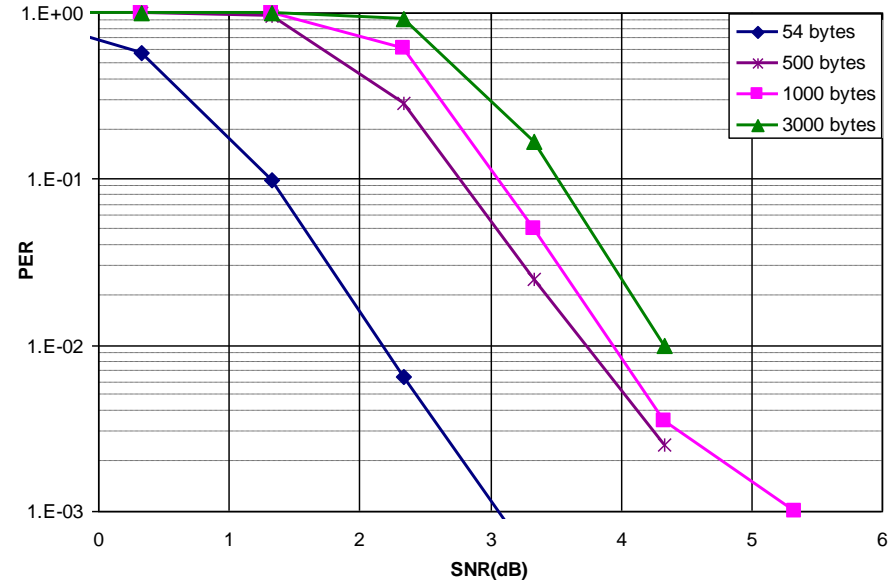


PER performance of different sizes


- Higher data rate requires higher SNR to maintain a certain PER
- Larger packet size results in higher SNR requirement

🔥 Performance Analysis (2)


- Link Throughput
 - $\text{Throughput} = R (1 - \text{PER})$
- Operation Range
 - System Tolerant:
7-8 m
 - High Data Rate:
within 1-2 m

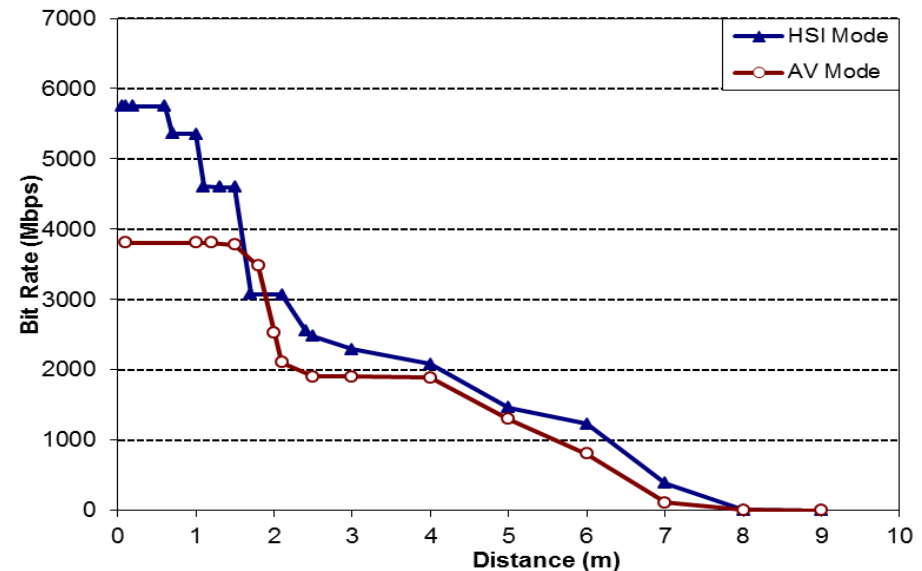

Performance Analysis (3)

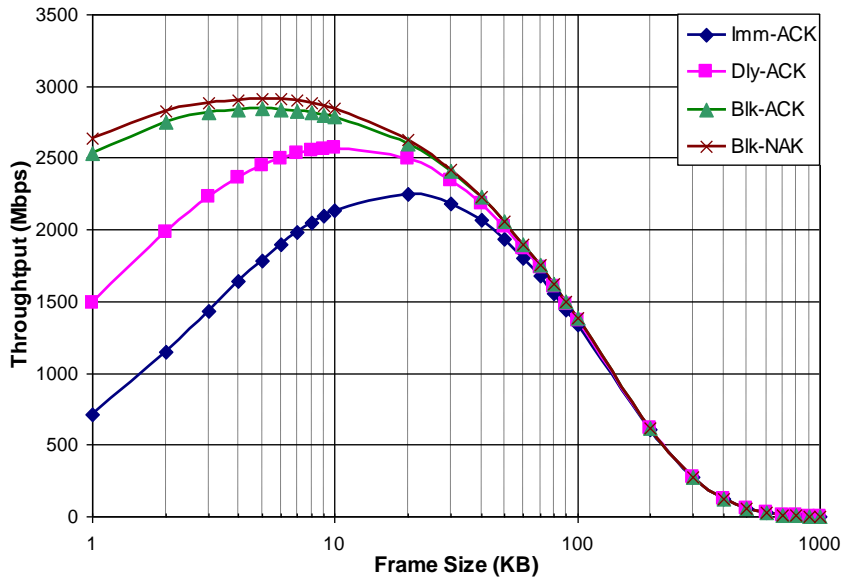

Throughput at BER= 10^{-6}

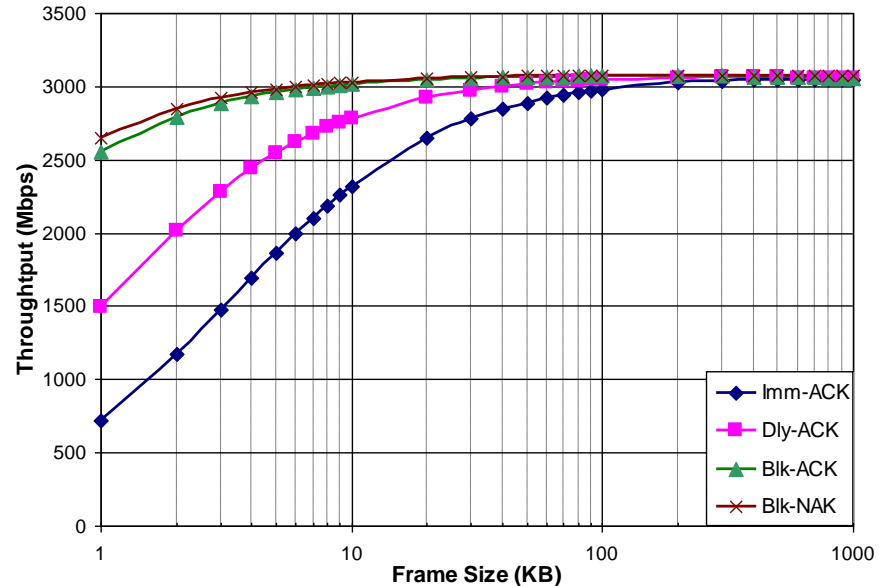


Throughput at BER= 10^{-9}

- Blk-ACK increases the MAC efficiency by up to 30%
- When BER is high, the MAC throughput increases up to a certain point with the increase of the frame size, then decreases
- When BER is low, the MAC throughput increases


🔥 Performance Analysis (4)

- Achievable MAC Throughput


- Imm-ACK throughput does not significantly change
- Blk-ACK throughput varies depending on the data rate

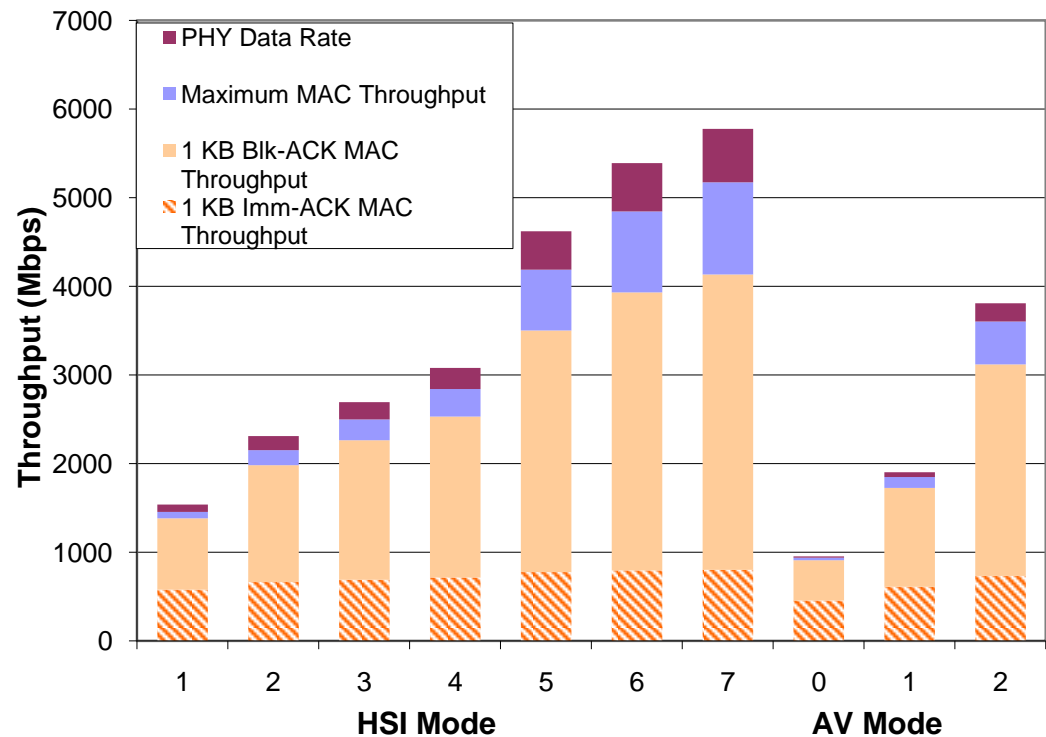

Performance Analysis (5)

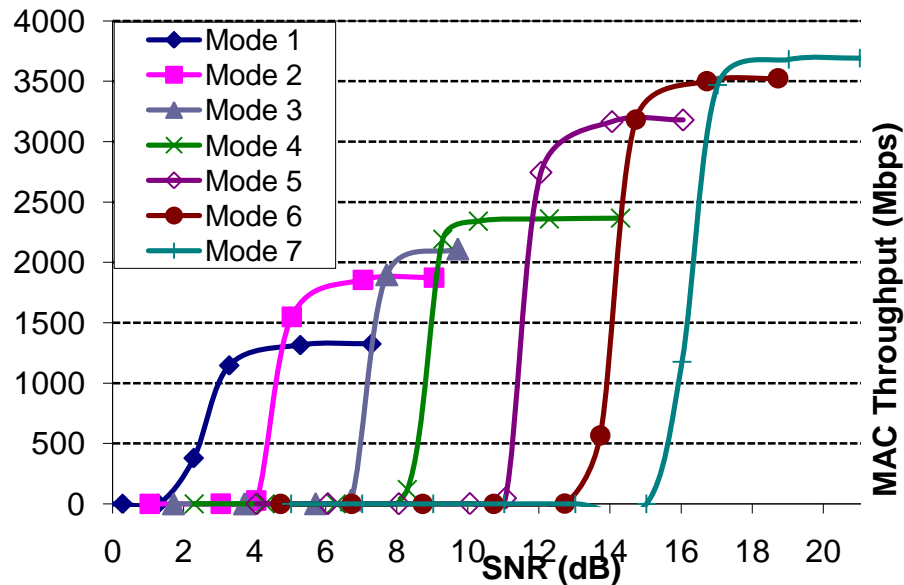

HSI link throughput for 1KB Blk-ACK

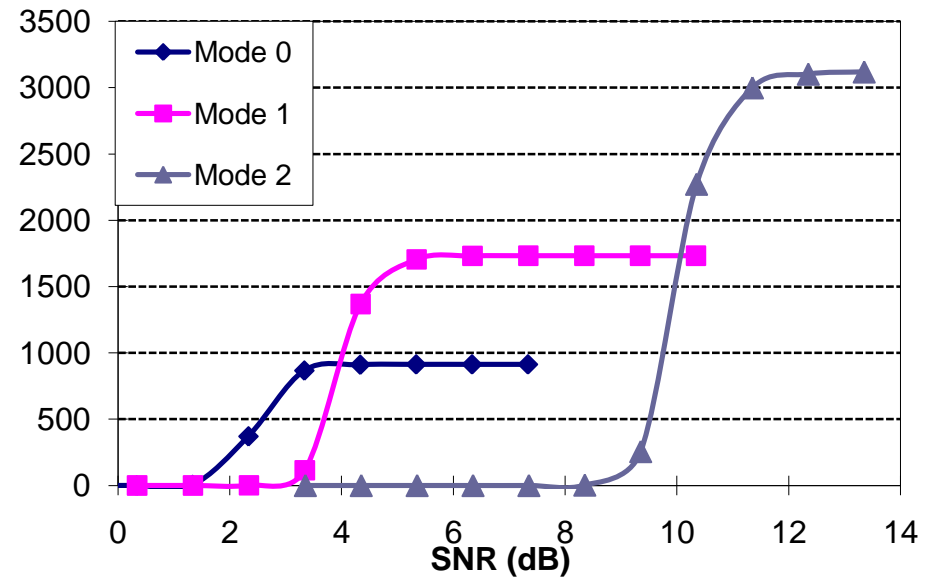

AV link throughput for 1KB Blk-ACK

- The MAC efficiency with Blk-ACK for 1KB payload varies from 72% to 96%
- The link throughput decrease due to the MAC layer overhead

Conclusion

- A detailed performance evaluation of the IEEE 802.15.3c standard over 60 GHz channel
- The guaranteed high data rate transmission range is within 2 meters
- Frame aggregation with Blk-ACK could increase the MAC throughput by 30%
- A 10-30 KB frame size could achieve the maximum MAC throughput under 10^{-6} BER, but may result in increased retransmission and delay; However, smaller frame size results in low MAC throughput efficiency



Thank you!